


IN8039

ULTI Bars - X3

FX4012 X6
(M6X16)




FX4016 X12
(M6)




FX4017 X6
(M6)




FX4042 X12
(M6)




MA6017 X6




MA6065 X6




ME0203 X6




ME0687 X2



ME0688 X2





ME0689 X2



TOOLS REQUIRED

10MM X 1




EN - SAFETY AND PRODUCT INFORMATION
DE - SICHERHEITS- UND PRODUKTINFORMATIONEN
FR - INFORMATIONS DE SÉCURITÉ ET DU PRODUIT
NL - VEILIGHEIDS- EN PRODUCTINFORMATIE
ES - INFORMACIÓN DE SEGURIDAD Y DEL PRODUCTO
IT - INFORMAZIONI SULLA SICUREZZA E SUL PRODOTTO


SV - SÄKERHETS- OCH PRODUKTINFORMATION
DA - SIKKERHEDS- OG PRODUKTINFORMATION
NO - SIKKERHETS- OG PRODUKTINFORMASJON
PL - INFORMACJE O BEZPIECZENSTWIE I PRODUKCIE
CS - INFORMACE O BEZPEČNOSTI A PRODUKTU



Customercare@van-guard.co.uk
UK +44 (0) 1392 368 351

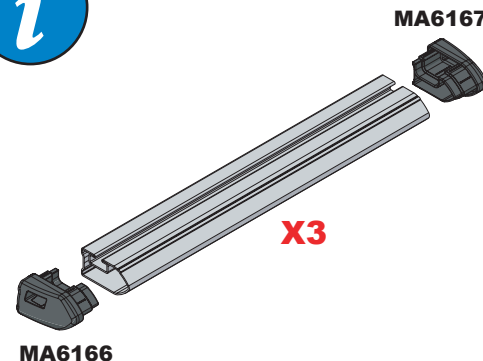

ULTI Bar Trade
(Steel)

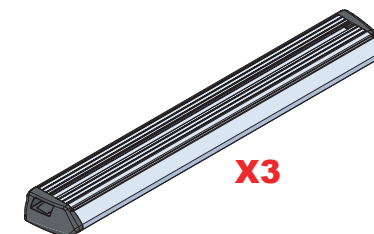

ULTI Bar+
(Aluminium)

This FITTING INSTRUCTION is the property of VAN GUARD ACCESSORIES LTD. and must not be used for manufacturing purposes, copied nor communicated in any way to third parties without written permission from VAN GUARD ACCESSORIES LTD.
IN8039_E (CN:00183)

Van Guard Accessories Ltd
Fair Oak Close, Exeter Airport Business Park,
Exeter, Devon, EX5 2UL
www.van-guard.co.uk

VG173



Vehicle:

Fiat Doblo: 2000 - 2010


Wheel Base: Standard (L1)

Roof Height: Standard (H1)


Rear Doors: Twin / Tailgate

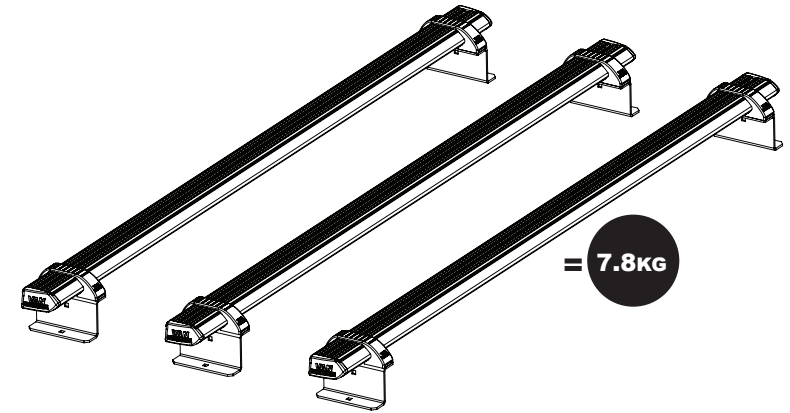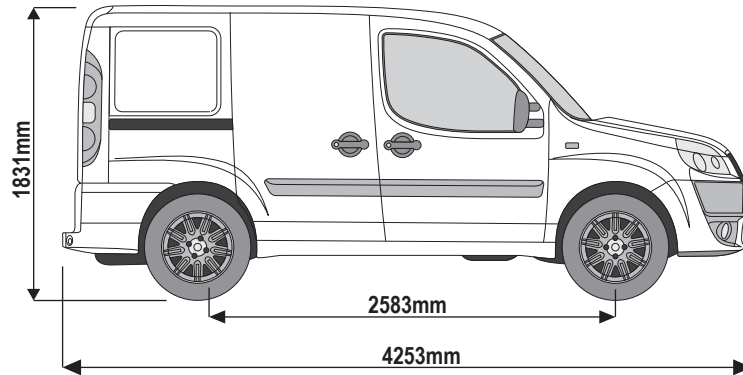


1

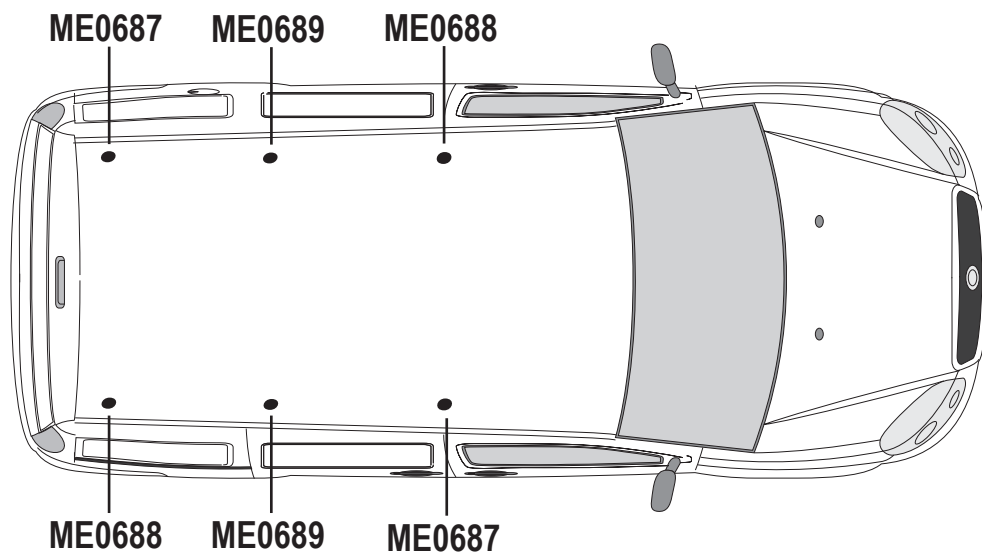


ME0687



ME0688




ME0689




2

Stick rubber pads to all roof brackets.

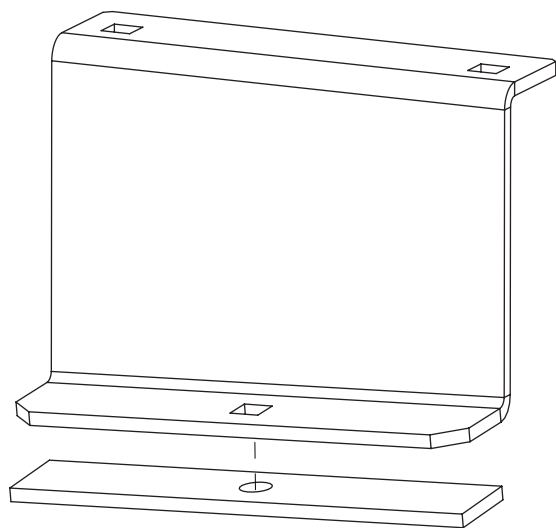


3


Remove the roof plugs to reveal the vehicles fixing points.

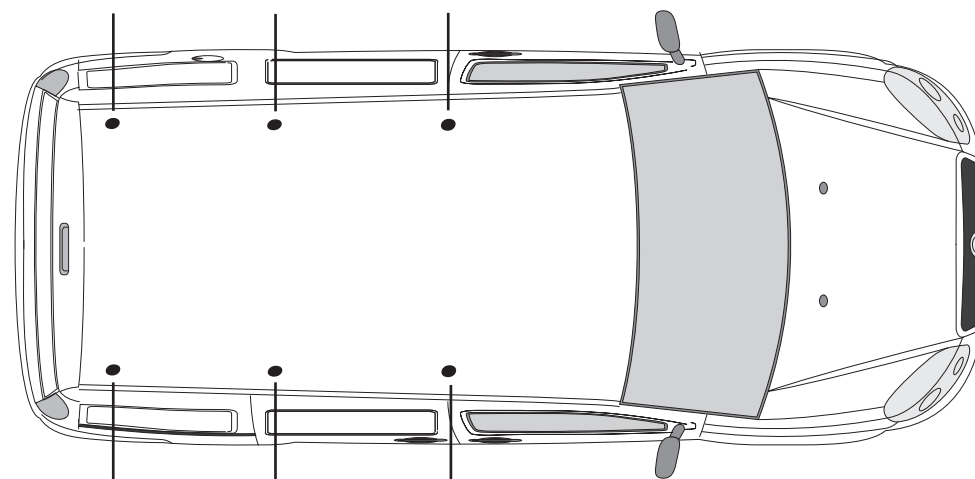


- 4** Place the roof brackets onto the roof and bolt down through the fixing points using M6X16 hex bolts & M6 washers.

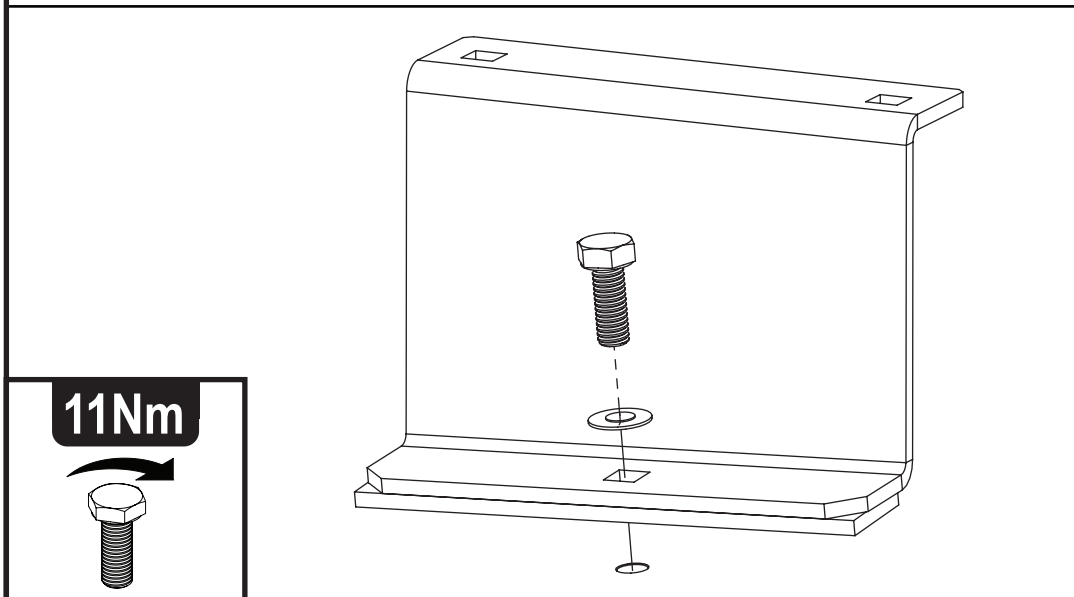


- 5** Place the roof bars onto the roof brackets and loosely secure using M6X16 coach bolts & M6 flange nuts.

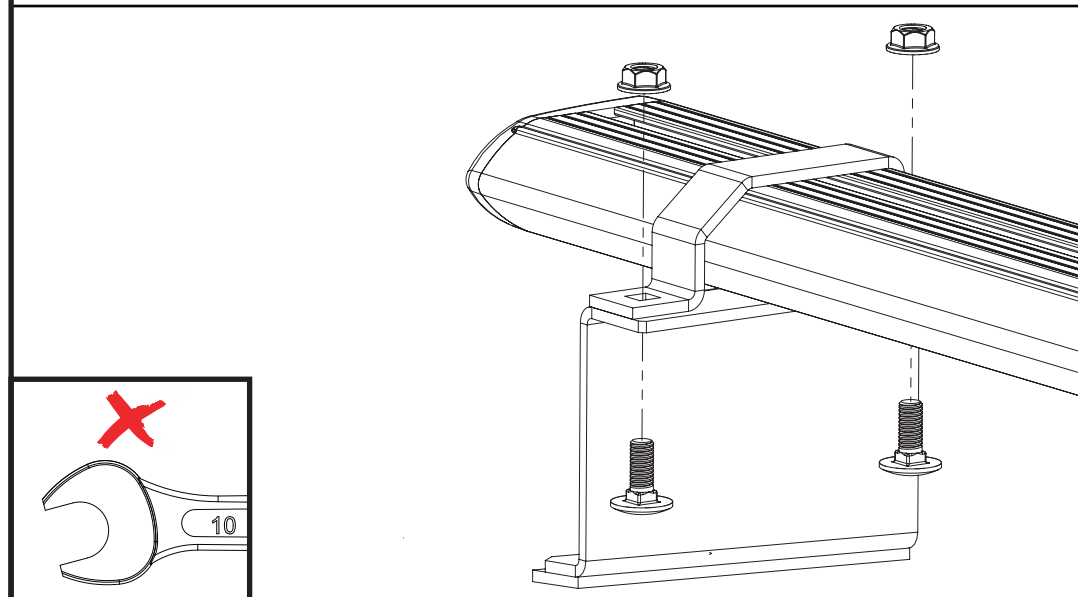


- 6** Adjust the roof bars to ensure that they are evenly spaced on the vehicle.

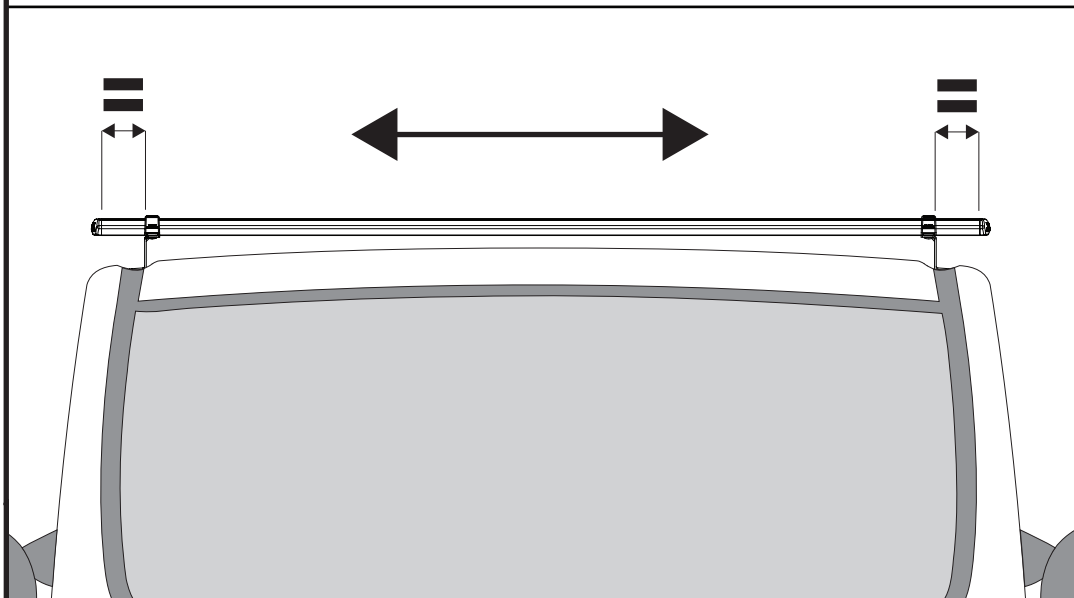


- 7** Tighten the roof bar fixings to 11Nm.

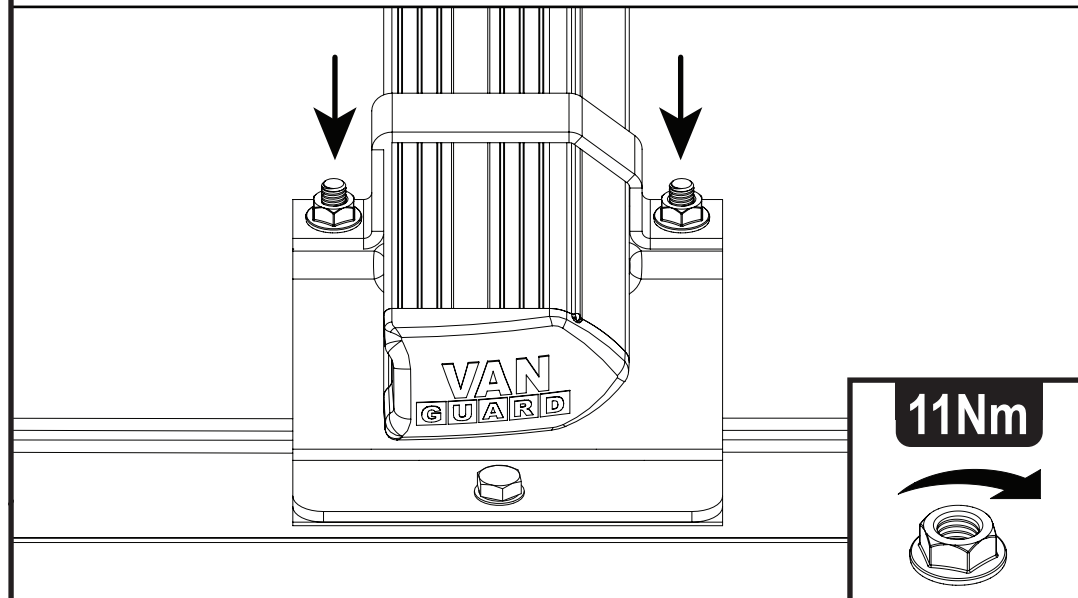




1.

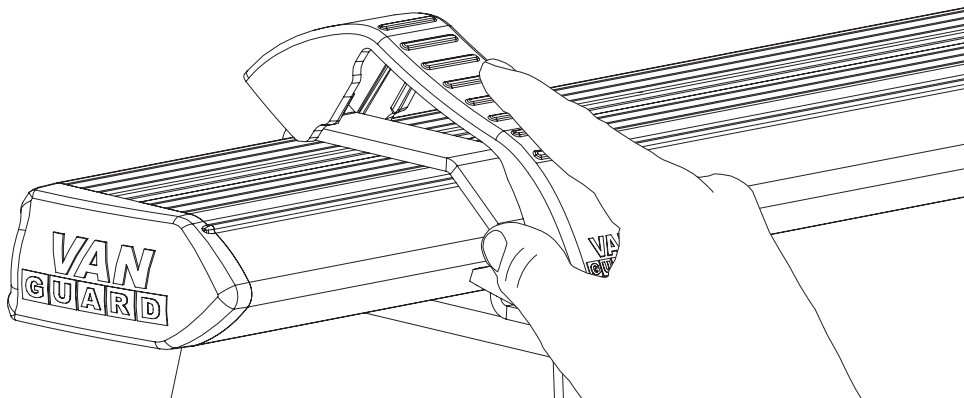

2.

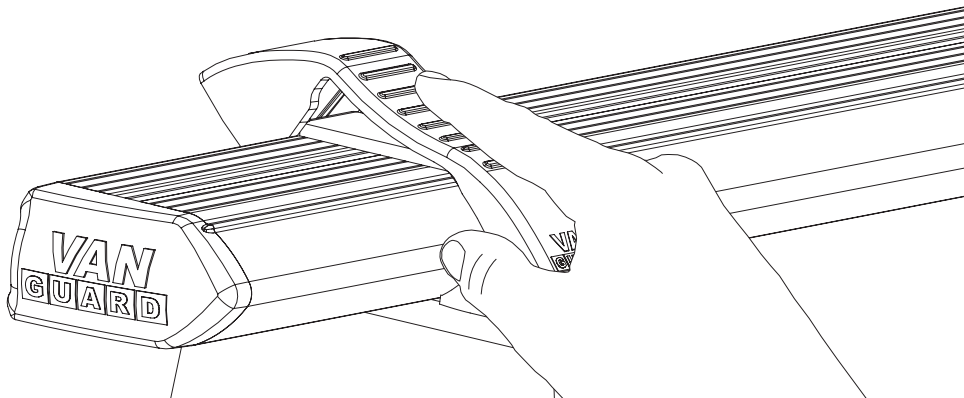

3.

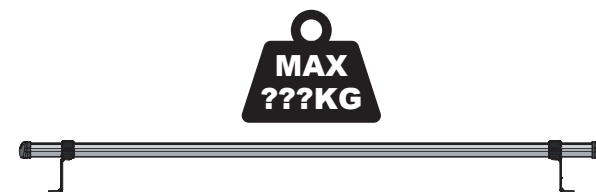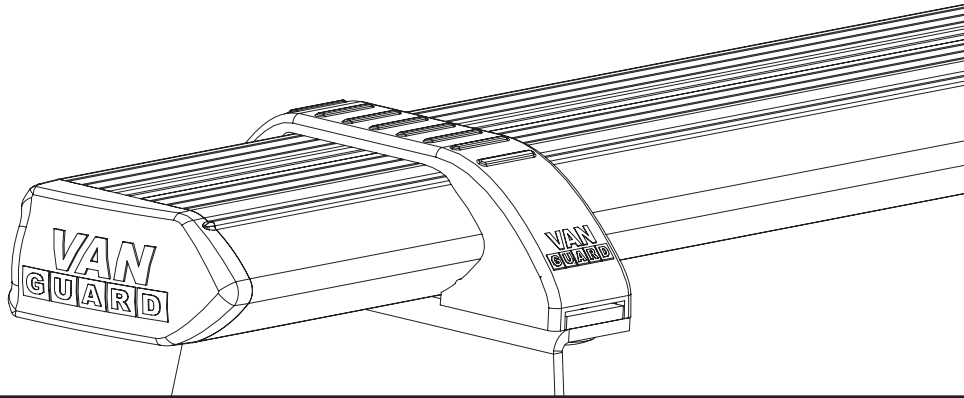


ULTI Bar Trade
(Steel)

MAX 60KG



ULTI Bar+
(Aluminium)

MAX 80KG

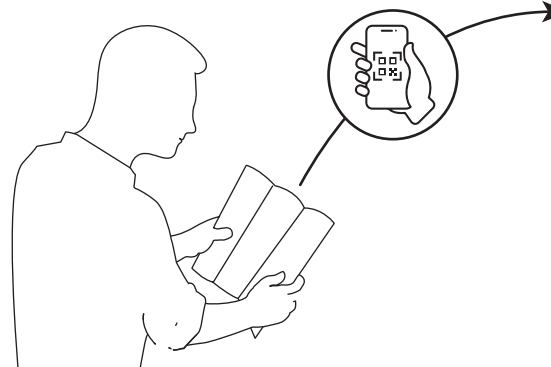

EN - SAFETY AND PRODUCT INFORMATION
DE - SICHERHEITS- UND PRODUKTINFORMATIONEN
FR - INFORMATIONS DE SÉCURITÉ ET DU PRODUIT
NL - VEILIGHEIDS- EN PRODUCTINFORMATIE
ES - INFORMACIÓN DE SEGURIDAD Y DEL PRODUCTO
IT - INFORMAZIONI SULLA SICUREZZA E SUL PRODOTTO

SV - SÄKERHETS- OCH PRODUKTINFORMATION
DA - SIKKERHEDS- OG PRODUKTINFORMATION
NO - SIKKERHETS- OG PRODUKTINFORMASJON
PL - INFORMACJE O BEZPIECZENSTWIE I PRODUKCIE
CS - INFORMACE O BEZPEČNOSTI A PRODUKTU