

IN9243

Handle Shield - Sliding Door

THANK YOU FOR PURCHASING A VAN GUARD HANDLE SHIELD


SUITS THE FOLLOWING MODELS

Vehicle:

Peugeot Boxer 2006 on
Fiat Ducato 2006 on
Citroen Relay 2006 on
Vauxhall Movano 2022 on

Door:

Sliding - Passenger's

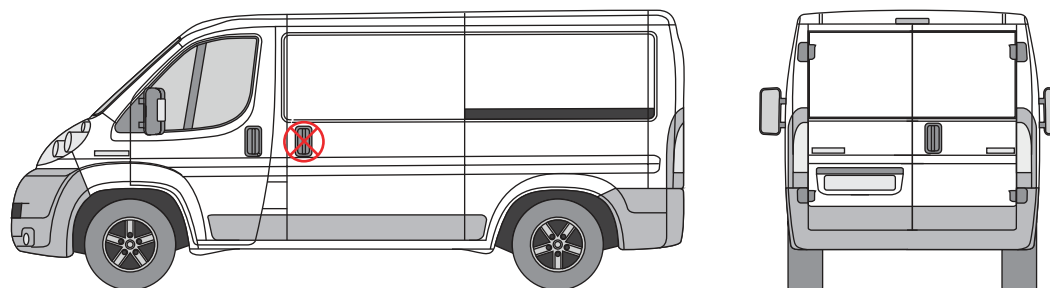

⊗ Indicates approximate placement of shield



CAUTION

PLEASE TAKE THE TIME TO READ THROUGH THE IMPORTANT INFORMATION BELOW BEFORE PROCEEDING TO FIT THIS PRODUCT



FAILURE TO TAKE NOTICE OF THE FOLLOWING INFORMATION MAY RESULT IN DAMAGE TO THE VEHICLE.



Important: Follow the instructions and all measurements carefully. Double check measurements before making any cuts. Drawings are for guidance only. Every effort has been made to ensure the accuracy of the instructions provided however Van Guard Accessories Ltd accepts no liability for any inaccuracies of either the drawings provided or vehicle variations. All bare metal should be treated with a manufacturer approved anti-corrosion compound and no liability is accepted for any incorrect installation or corrosion to body panels or within cavities. It is the sole responsibility of the installer to ensure the suitability of both the vehicle and of the supplied parts before installation is started. No liability is accepted for the fitting of the products.


This FITTING INSTRUCTION is the property of VAN GUARD ACCESSORIES LTD. and must not be used for manufacturing purposes, copied nor communicated in any way to third parties without written permission from VAN GUARD ACCESSORIES LTD.

IN9243_B (CN:00114)


Van Guard Accessories Ltd
Fair Oak Close, Exeter Airport Business Park,
Exeter, Devon, EX5 2UL
www.van-guard.co.uk

SUPPLIED COMPONENTS

ME3103 X1
(SHIELD)

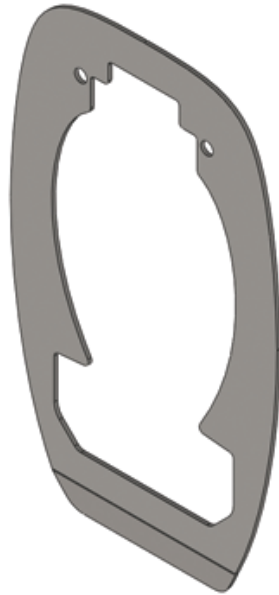

ME3104 X1
(INTERNAL SHIELD)

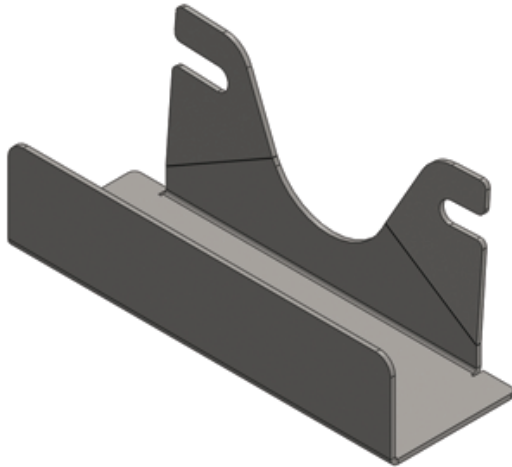

Wear the appropriate protective equipment (safety glasses & gloves) while fitting this product.



Dispose of packaging materials responsibly - Do not dispose until you have checked all parts and fixings are present.

FITTED IMAGE



1. REMOVAL OF THE DOOR PANEL

Leave the rear door open while carrying out this installation.

Remove the door panel. Retain all components for refitting at the end of the installation.




2. REMOVAL OF THE INTERNAL RELEASE

Remove the internal release handle (3X 5mm allen screws).



3.1. REMOVAL OF THE EXTERNAL HANDLE

Undo the 4X 10mm nuts to release the external door handle assembly.

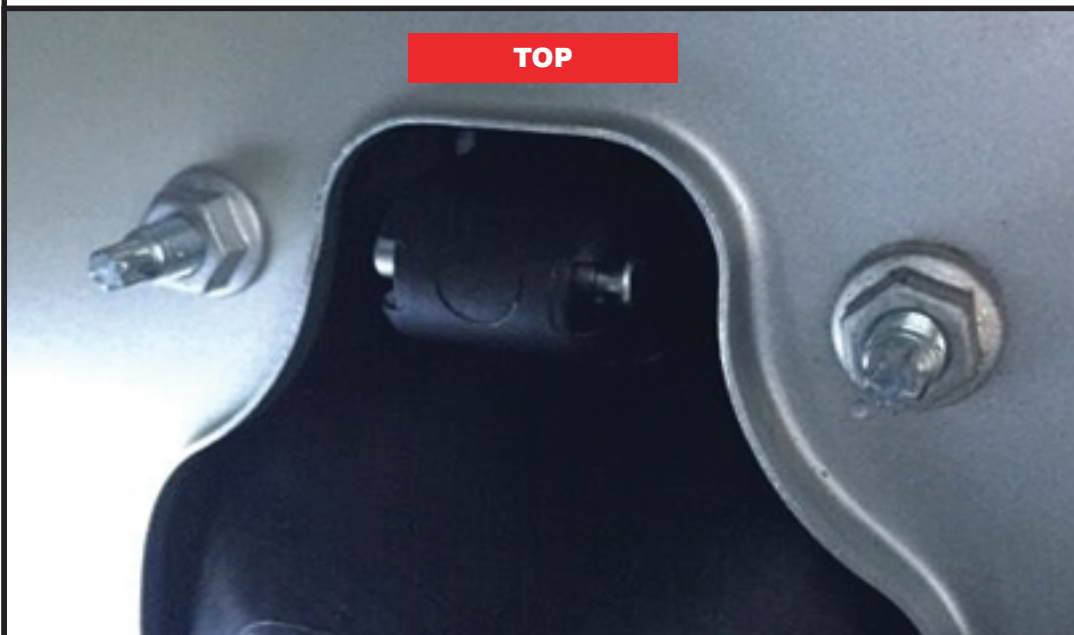


3.2. REMOVAL OF THE EXTERNAL HANDLE

Remove the external handle assembly from the aperture and unclip the three cables from the back of the handle.



4. POSITION SHIELD

Position the supplied shield over the handle with the folded edge along the bottom facing up towards you (the fold follows the contour of the vehicles door panel). Apply a bead of clear silicone sealer to the rear of the plate.

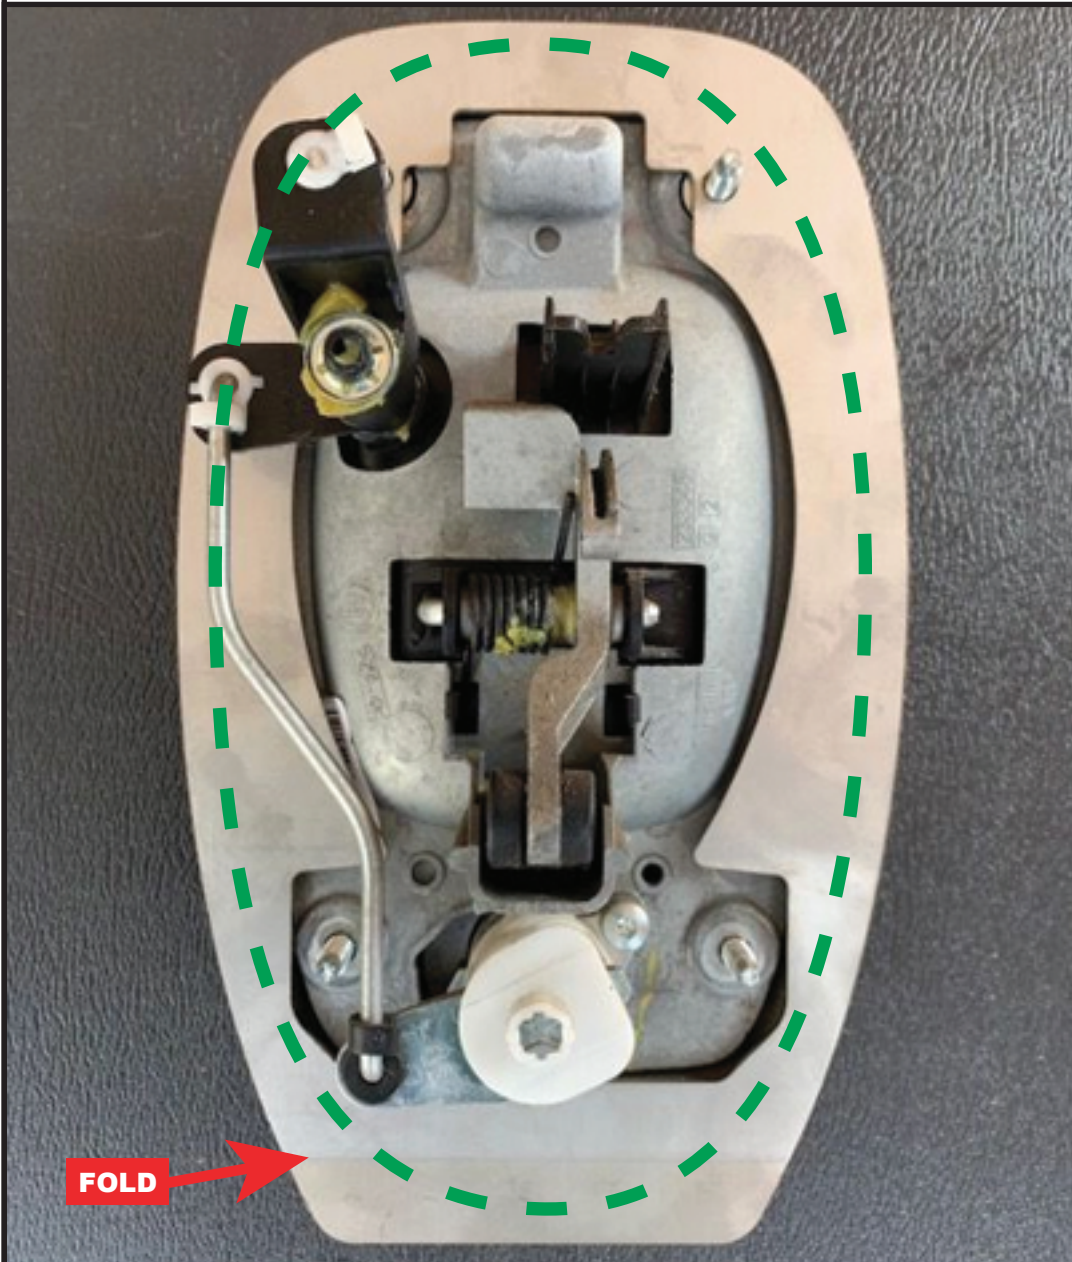

5. REFIT THE HANDLE

Clip the three cables back into position and then place the handle back into the aperture and secure the top two nuts.



6. FITTING THE INTERNAL SHIELD

Place the supplied internal shield into position over the two studs and then secure the bottom two nuts.



7. REFITTING THE DOOR PANEL

Refit the internal release handle and check that everything is operating correctly. Once checked, refit the door panel.



8. COMPLETING THE INSTALLATION

The completed handle shield looks like this.

